




Portable Air Conditioning

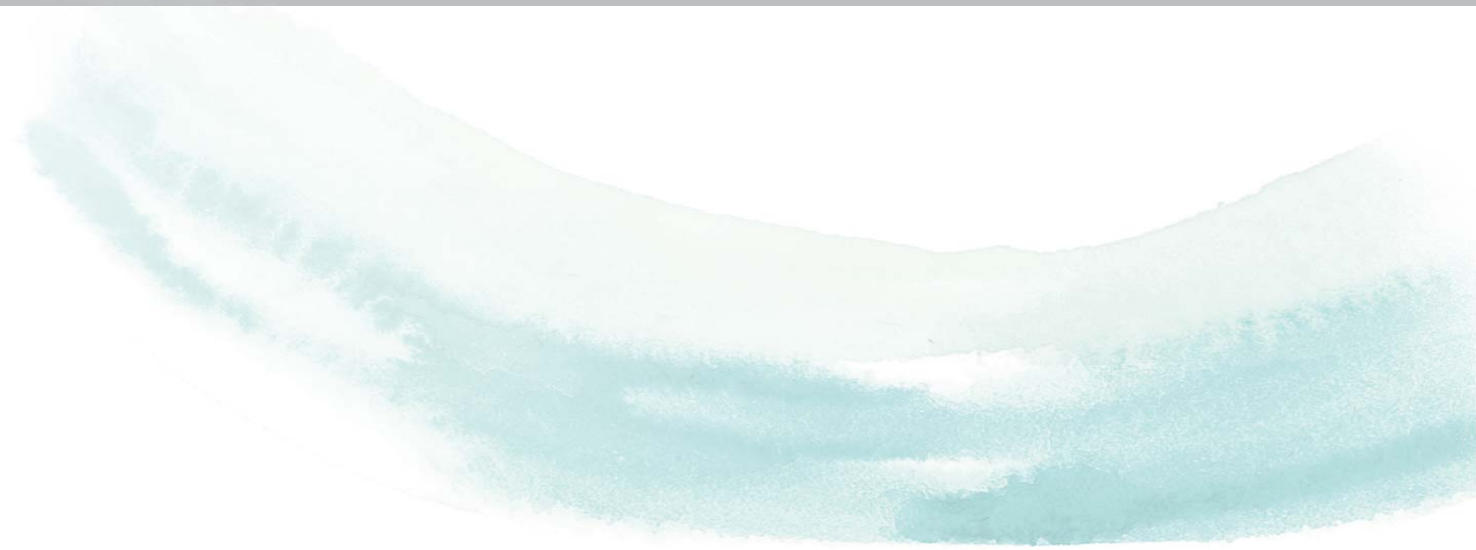

Key Features

Design

Appearance
Innovative & Compact Design

Display
LED Display

Control
Ergonomic design of control panel
(right hand operation habit)

Smart

Air Flow
Cool down the room quickly with auto-swing function

Air Outlet
The air outlet can open and close automatically when switch on/off

Self-Diagnosis
Show the error code when the unit has a malfunction

24h Timer
Switch on/off the unit whenever you want

Friendly

Draining
Two drain ports, both auto-draing and manual draining is available

Universal Wheels
The unit can be moved wherever that you want easily

Controller Bracket
Special design to hold the remote controller, avoid missing the controller

Power Cable Holder
Hold the power cable, avoid any accident

Performance

Multi-Function
Can be used as AC/Fan/Dehumidifier in you home or office

Strong Performance
Strong cooling capacity
Strong airflow (350m³/hr, 9k model)

Low Noise
48dB(A) at low fan speed

Portable Air Conditioning

Profile



Ideal for home & office use as an air conditioner, fan cooler and dehumidifier.

Specifications

Model		Unit	AM09AN1LAA	AM09AN1HAA	AM12AN1LAA	AM12AN1HAA
Cooling capacity	Btu/h		9000	9000	12000	12000
	W		2640	2640	3520	3520
Heating capacity	Btu/h		N/A	10000	N/A	13000
	W		N/A	2930	N/A	3800
Power Supply		V~Hz,Ph	220 ~ 240,50,1	220 ~ 240,50,1	220 ~ 240,50,1	220 ~ 240,50,1
Rated Input	Cooling	W	1010	1010	1350	1350
Rated Current	Cooling	A	4.8	4.8	6.4	6.4
Rated Input	Heating	W	N/A	1060	N/A	1400
Rated Current	Heating	A	N/A	5.0	N/A	6.6
EER for Cooling(R-410A)	Btu/W·h		8.91	8.91	8.90	8.90
	W/W		2.61	2.61	2.61	2.61
COP for Heating(R-410A)	Btu/W·h		N/A	9.43	N/A	9.26
	W/W		N/A	2.76	N/A	2.71
Energy Class (EER/COP)		/	A/-	A/-	A/-	A/-
Moisture Removal		L/h	1	1	1.4	1.4
Air Circulation		m³/h	350	350	400	400
Noise	High	dB(A)	53	53	54	54
	Mid	dB(A)	51	51	52	52
	Low	dB(A)	48	48	49	49
Body Size	W×H×D	mm	428×742×383	428×742×383	428×742×383	428×742×383
Package Size	W×H×D	mm	488×876×420	488×876×420	488×876×420	488×876×420
Net Weight/Gross Weight		kg	30.5/34.3	30.7/34.5	31.5/35.3	31.7/35.7
Appliation Area		m²	15 ~ 20	15 ~ 20	20 ~ 25	20 ~ 25
Loading Quantity	Set/40" HQ		394	394	394	394
	Set/40" GQ		264	264	264	264
	Set/20"		132	132	132	132

* Remarks:1 The above technical data are for reference only. Haier reserves the right to modify them without notice.